


Camaplast GRP Laminate - Summary Data Sheet

Camaplast Glass Reinforced Polyester (GRP) laminates are supplied in sheets (L x H) wrapped in rolls or cut into sheets. The information below is a summary of the main technical characteristics of the product, the series of commercially available products and a summary of the commercial conditions.

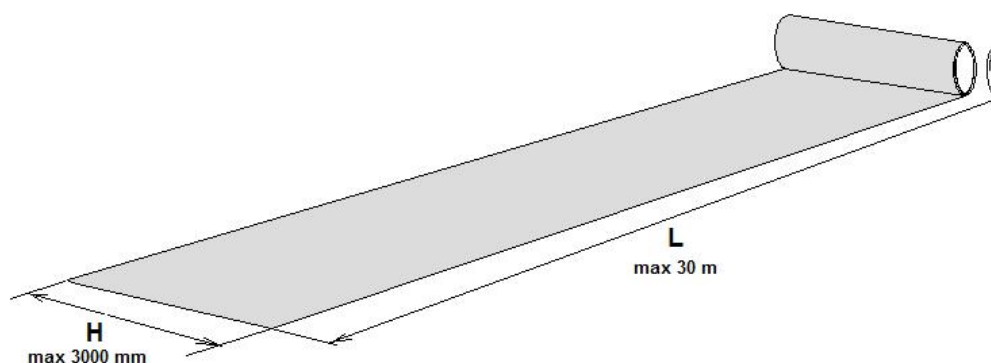


MAIN FEATURES			
	Series	P	G
Trade name		Piano	Gelcoat
Thickness (mm) ⁽¹⁾		1-10	1-10
Height H (mm)		max 3000	max 3000
Length L (m)		max 30	max 30
Fiberglass (g/m ²)		300-4500	300-4500
Fiber/resin (%)		20-40	20-40
Aesthetic appearance main surface		lucido opaco carteggiato antisdrucchiolo	lucido opaco
Opposite surface appearance		P glossy PM matt PC sanded PR exposed fibre	GL glossy GM matt GC sanded GR exposed fibre

USER GUIDE	Recommended series
By field of application	
UV resistant surfaces	G
Easily washable surfaces	P, G
Surfaces to be repainted	G
Surfaces in contact with food	G
Porosity-free surfaces	G
By sector	
Side walls and roofs campers/vans	G
Funds for campers/vans	P, G
Cold rooms	G
Partitions and walls with high mechanical strength	P
Hygroscopic barrier	P
Walls for cladding	P, G
Doors and accessories for animal husbandry	Bilici, Paratoie
Greenhouses and glazing	Crystal
By type of gluing	
With polyurethane glues	PC, GC
With polyester-type resins	PR, GR
With foams	P, GL

Main Products

GELCOAT LAMINATES (series G)			PIANO LAMINATES (series P)		
PRODUCT CODE⁽⁴⁾	COMPOSITION Fibre glass (g/m²)	NOMINAL THICKNESS⁽¹⁾ (mm)	PRODUCT CODE⁽⁴⁾	COMPOSITION Fibre glass (g/m²)	NOMINAL THICKNESS⁽¹⁾ (mm)
G300	300	1,0	P300	300	1,0
G375	375	1,2	P375	375	1,2
G450	450	1,4	P450	450	1,5
G600	600	1,6	P600	600	1,7
G750	750	1,8	P750	750	2,0
G900	900	2,0	P900	900	2,5
G1125	1125	2,5	P1125	1125	3,0
G1350	1350	3,0	P1350	1350	3,0
G1800	1800	4,0	P1800	1800	4,0
G2250	2250	5,0	P2250	2250	5,0
G2700	2700	6,0	P2700	2700	6,0
G3150	3150	7,0	P3150	3150	7,0
G3600	3600	8,0	P3600	3600	8,0

(4) Product code description:

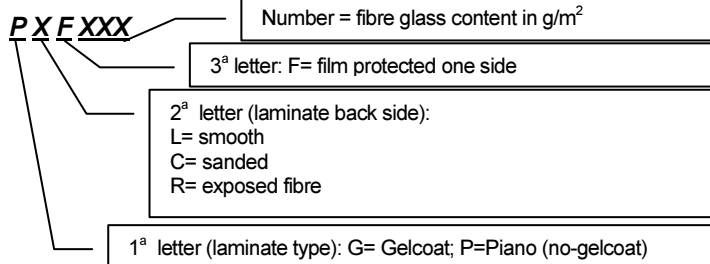

Example: GCF600 = Gelcoat laminate protected by Film and with back side sanded surface. Produced with 600 g/m² of fiberglass.

Summary of commercial conditions:

Goods supplied in..... rolls 30 m long or 30+30m or sheets
 Minimum supply..... lot 60m² per type
 Transport..... ex-work or CIP

Other conditions:

(1) Camaplast laminates are guaranteed in terms of fiberglass content and not thickness. The thickness of the laminate is only the statistical result on production and its tolerance generally falls for 90% of the product between +/- 0.2mm for thicknesses up to 2mm and +/- 10% for thicknesses over 2mm.

(2) Standard laminate size: length 30 m invariable; max height 3000 mm. Minimum height 670mm. For productions lower in height than 2000mm any off-cuts charged to the customer.

(3) Offers/Prices are valid only in the case of stable price conditions for raw materials (resins and fibres). In the event of changes in the price of raw materials exceeding 10% during the period of validity of the relevant offer, Camaplast reserves the right to update the prices. In this case, if the Customer does not accept the new conditions, Camaplast may withdraw from the excluded supply contract for the quantities already produced to the customer prior to the communication of the price change.

The goods travel at the risk and peril of the customer if ex-work or carriage paid with charge on the invoice. We do not accept transport claims after eight days from receipt of the goods. We do not accept returns unless authorized and port francs. On the amount of overdue invoices will be applied default interest equal to 2% more than the official discount rate charged by the Bank of Italy. For any dispute, the court of the Court of Ferrara (Italy) will be competent.

For the complete general conditions of sale, please refer to the specific section at the internet address www.camaplast.com

